
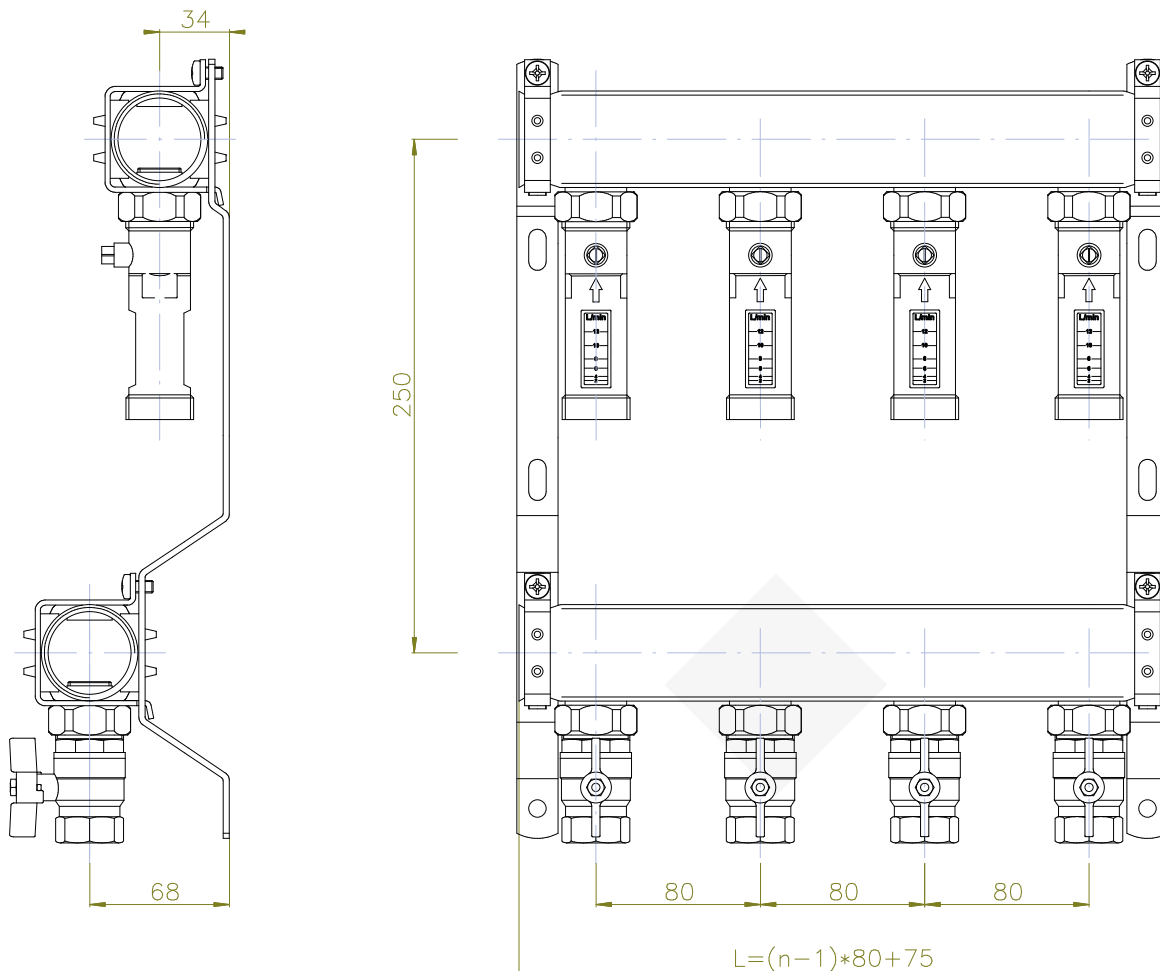


Specifications		Circuits	Type	Length	Art-Nr.
 <p>Manifolds: Stainless Steel AISI 304</p> <p>Dimension: DN50 Stainless Steel profile, 1760mm² cross-sectional area</p> <p>Connections: 1 1/4" female head connection on both sides</p> <p>Supply: Ball valves DN20</p> <p>Return: Flowmeter 2,0-12,0 l/min</p> <p>Connections: Supply 3/4" fem., Return 3/4" male, center distance 80mm</p>		2	IN-KHF 2	155 mm	2302
		3	IN-KHF 3	235 mm	2303
		4	IN-KHF 4	315 mm	2304
		5	IN-KHF 5	395 mm	2305
		6	IN-KHF 6	475 mm	2306
		7	IN-KHF 7	555 mm	2307
		8	IN-KHF 8	635 mm	2308
		9	IN-KHF 9	715 mm	2309
		10	IN-KHF 10	795 mm	2310
		11	IN-KHF 11	875 mm	2311
		12	IN-KHF 12	955 mm	2312
		13	IN-KHF 13	1035 mm	2313
		14	IN-KHF 14	1115 mm	2314

Delivery:

Stainless steel manifold packages include supply manifold and return manifold, each with one 1/2" female outlet connection for air vents or charge/discharge valves. The manifold is delivered in a box with noise reducing brackets and stickers.



L = Length of manifold n = Number of circuits