
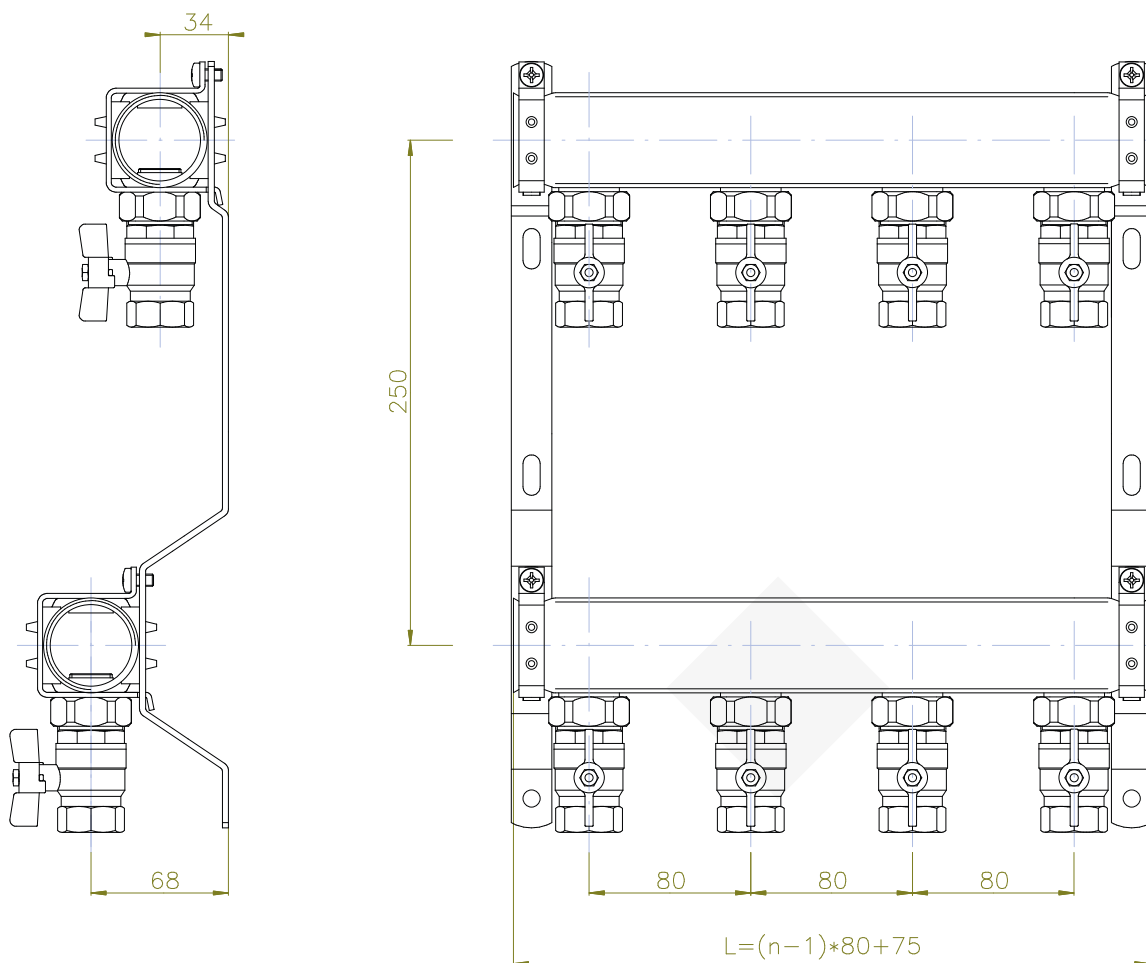


Specifications		Circuits	Type	Length	Art-Nr.
 <p>Manifolds: Stainless Steel AISI 304</p> <p>Dimension: DN50 Stainless Steel profile, 1760mm² cross-sectional area</p> <p>Connections: 1 1/4" female head connection on both sides</p> <p>Supply: Ball valves DN20</p> <p>Return: Ball valves DN20</p> <p>Connections: 3/4" female, center distance 80mm</p>		2	IN-KH 2	155 mm	2102
		3	IN-KH 3	235 mm	2103
		4	IN-KH 4	315 mm	2104
		5	IN-KH 5	395 mm	2105
		6	IN-KH 6	475 mm	2106
		7	IN-KH 7	555 mm	2107
		8	IN-KH 8	635 mm	2108
		9	IN-KH 9	715 mm	2109
		10	IN-KH 10	795 mm	2110
		11	IN-KH 11	875 mm	2111
		12	IN-KH 12	955 mm	2112
		13	IN-KH 13	1035 mm	2113
		14	IN-KH 14	1115 mm	2114

Delivery:

Stainless steel manifold packages include supply manifold and return manifold, each with one 1/2" female outlet connection for air vents or charge/discharge valves. The manifold is delivered in a box with noise reducing brackets and stickers.



L = Length of manifold n = Number of circuits