
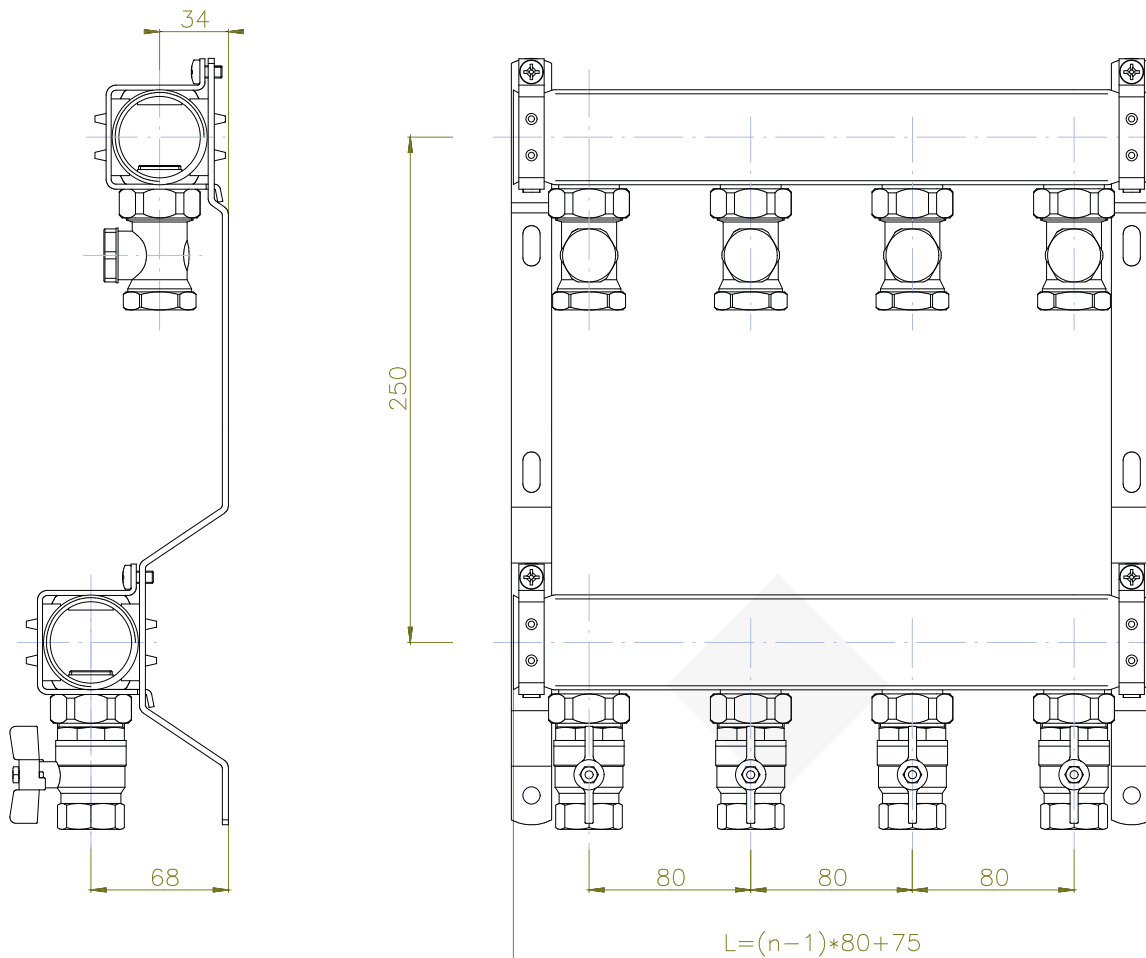


Specifications		Circuits	Type	Length	Art-Nr.
					
<b>Manifolds:</b>	Stainless Steel AISI 304	<b>2</b>	IN-KR 2	155 mm	<b>2202</b>
<b>Dimension:</b>	DN50 Stainless Steel profile, 1760mm <sup>2</sup> cross-sectional area	<b>3</b>	IN-KR 3	235 mm	<b>2203</b>
<b>Connections:</b>	1 1/4" female head connection on both sides	<b>4</b>	IN-KR 4	315 mm	<b>2204</b>
<b>Supply:</b>	Balancer lockshields DN20	<b>5</b>	IN-KR 5	395 mm	<b>2205</b>
<b>Return:</b>	Ball valves DN20	<b>6</b>	IN-KR 6	475 mm	<b>2206</b>
		<b>7</b>	IN-KR 7	555 mm	<b>2207</b>
		<b>8</b>	IN-KR 8	635 mm	<b>2208</b>
		<b>9</b>	IN-KR 9	715 mm	<b>2209</b>
		<b>10</b>	IN-KR 10	795 mm	<b>2210</b>
		<b>11</b>	IN-KR 11	875 mm	<b>2211</b>
		<b>12</b>	IN-KR 12	955 mm	<b>2212</b>
		<b>13</b>	IN-KR 13	1035 mm	<b>2213</b>
<b>Connections:</b>	3/4" female, center distance 80mm	<b>14</b>	IN-KR 14	1115 mm	<b>2214</b>

**Delivery:**

Stainless steel manifold packages include supply manifold and return manifold, each with one 1/2" female outlet connection for air vents or charge/discharge valves. The manifold is delivered in a box with noise reducing brackets and stickers.



L = Length of manifold n = Number of circuits