
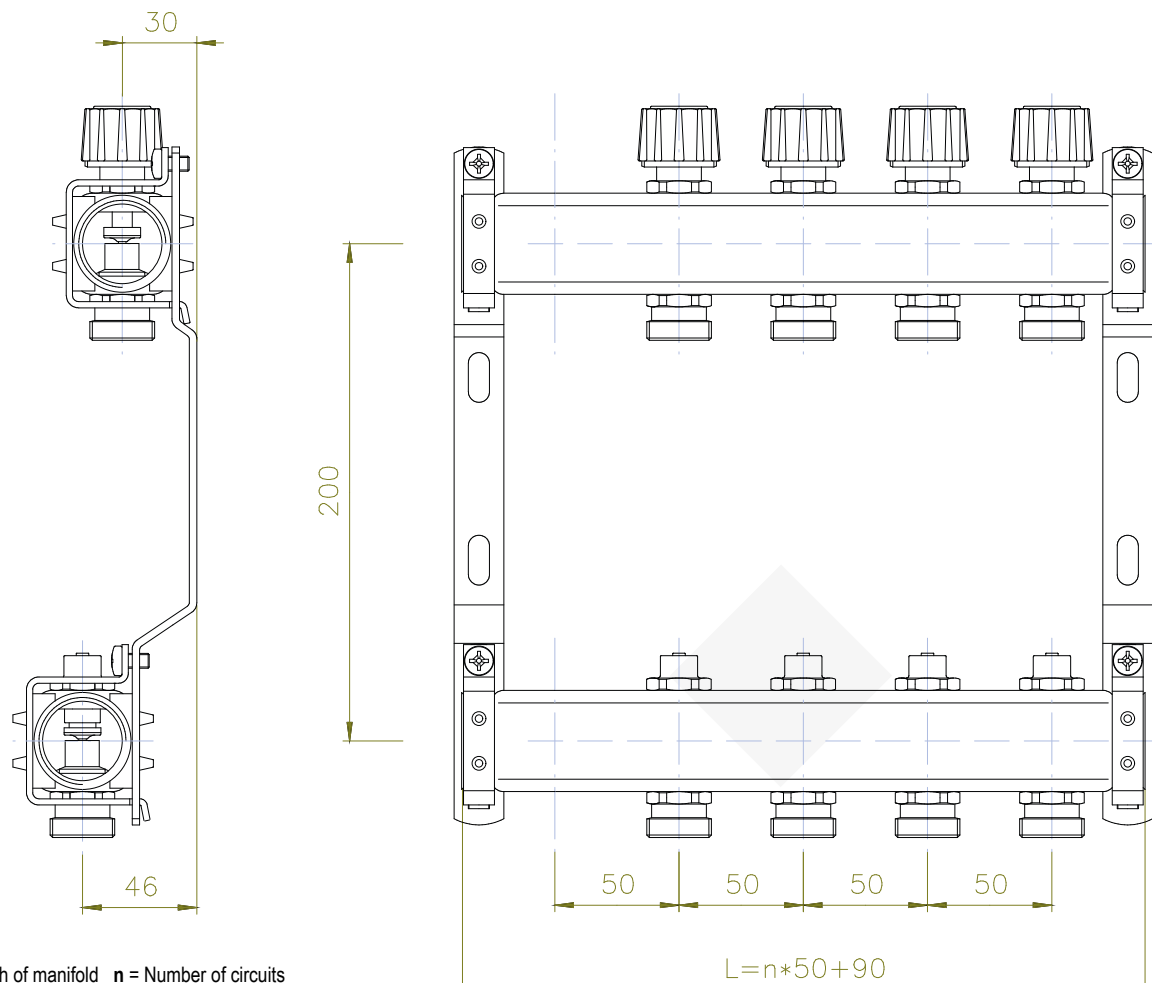


Specifications		Circuits	Type	Length	Art-Nr.
					
Manifolds:	Stainless Steel AISI 304	2	VA-FBi 2	190 mm	3402
Dimension:	DN32 Stainless Steel profile, 1330mm ² cross-sectional area	3	VA-FBi 3	240 mm	3403
Connections:	1" female head connection on both sides	4	VA-FBi 4	290 mm	3404
Supply:	Built-in balancer register lockshields	5	VA-FBi 5	340 mm	3405
Return:	Built-in control valves with pre-setting <ul style="list-style-type: none"> • M30x1,5mm threads • with handwheel • ready for electrothermic actuators • Kvs 2,74 	6	VA-FBi 6	390 mm	3406
		7	VA-FBi 7	440 mm	3407
		8	VA-FBi 8	490 mm	3408
		9	VA-FBi 9	540 mm	3409
		10	VA-FBi 10	590 mm	3410
		11	VA-FBi 11	640 mm	3411
		12	VA-FBi 12	690 mm	3412
		13	VA-FBi 13	740 mm	3413
Connections:	secondary, 3/4" male-Eurocone, center distance 50mm				

Delivery:

Stainless steel manifold packages for Underfloor Heating include supply manifold and return manifold, each with two 1/2" female outlet connections for air vents and charge/discharge valves. The manifold is assembled in noise reducing brackets. Delivered in a box with stickers and manual.



L = Length of manifold n = Number of circuits