
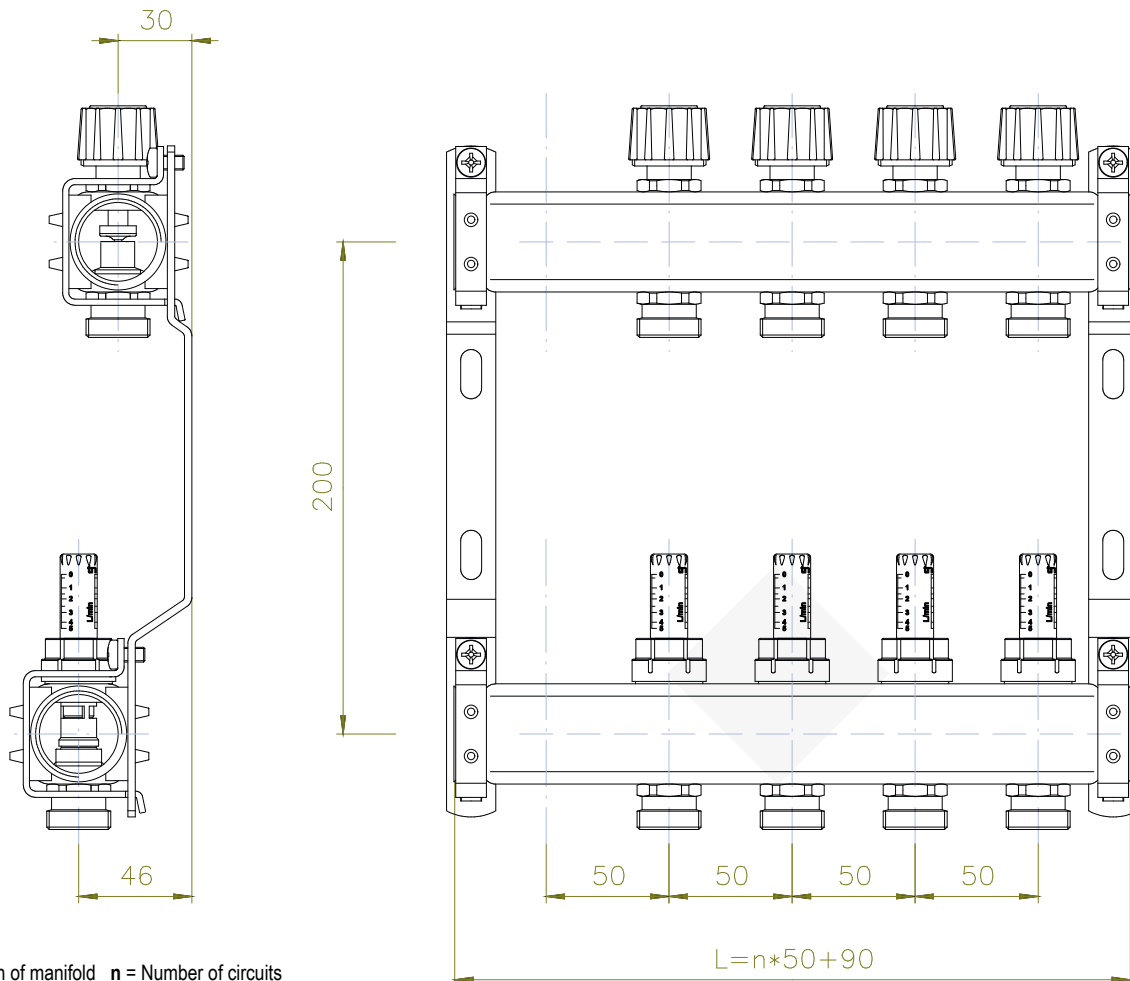


Specifications		Circuits	Type	Length	Art-Nr.
					
Manifolds:	Stainless Steel AISI 304	2	VA-FBif 2	190 mm	3702
Dimension:	DN32 Stainless Steel profile, 1330mm ² cross-sectional area	3	VA-FBif 3	240 mm	3703
Connections:	1" female head connection on both sides	4	VA-FBif 4	290 mm	3704
Supply:	Flowmeter 0-5,0 l/min	5	VA-FBif 5	340 mm	3705
Return:	Built-in control valves with pre-setting <ul style="list-style-type: none"> • M30x1,5mm threads • with handwheel • ready for electrothermic actuators • Kvs 2,74 	6	VA-FBif 6	390 mm	3706
		7	VA-FBif 7	440 mm	3707
		8	VA-FBif 8	490 mm	3708
		9	VA-FBif 9	540 mm	3709
		10	VA-FBif 10	590 mm	3710
		11	VA-FBif 11	640 mm	3711
		12	VA-FBif 12	690 mm	3712
		13	VA-FBif 13	740 mm	3713
Connections:	secondary, 3/4" male-Eurocone, center distance 50mm				

Delivery:

Stainless steel manifold packages for Underfloor Heating include supply manifold and return manifold, each with two 1/2" female outlet connections for air vents and charge/discharge valves. The manifold is assembled in noise reducing brackets. Delivered in a box with stickers and manual.



L = Length of manifold n = Number of circuits