
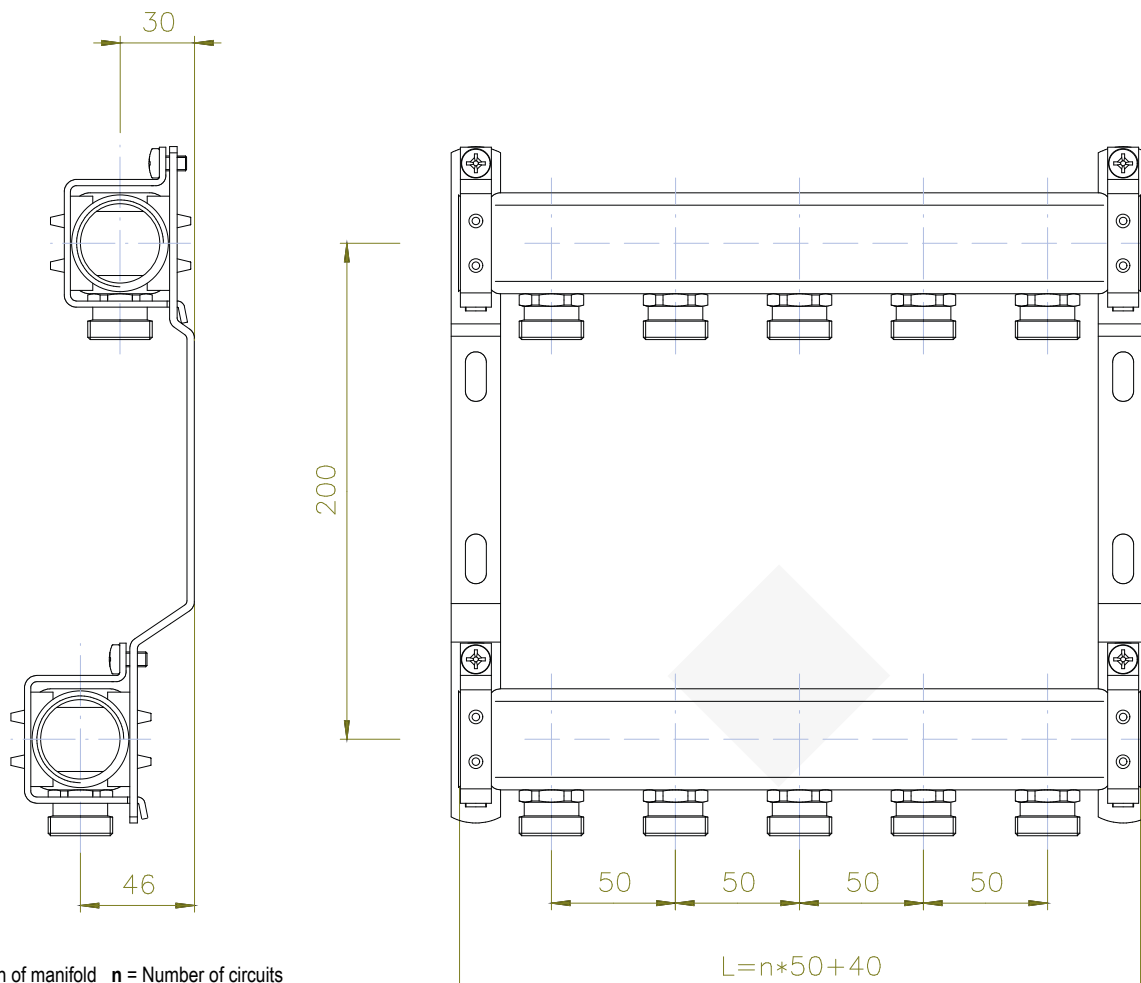


Specifications		Circuits	Type	Length	Art-Nr.
 <p><b>Manifolds:</b> Stainless Steel AISI 304</p> <p><b>Dimension:</b> DN32 Stainless Steel profile, 1330mm<sup>2</sup> cross-sectional area</p> <p><b>Connections:</b> 1" female head connection on both sides</p> <p><b>Supply:</b> 3/4" male-Eurocone</p> <p><b>Return:</b> 3/4" male-Eurocone</p> <p><b>Connections:</b> center distance 50mm</p>					
		2	VA-HK 2	140 mm	2902
		3	VA-HK 3	190 mm	2903
		4	VA-HK 4	240 mm	2904
		5	VA-HK 5	290 mm	2905
		6	VA-HK 6	290 mm	2906
		7	VA-HK 7	390 mm	2907
		8	VA-HK 8	440 mm	2908
		9	VA-HK 9	490 mm	2909
		10	VA-HK 10	540 mm	2910
		11	VA-HK 11	590 mm	2911
		12	VA-HK 12	640 mm	2912
		13	VA-HK 13	690 mm	2913
		14	VA-HK 14	740 mm	2914

**Delivery:**

Stainless steel manifold packages for Radiator connection include supply manifold and return manifold, each with one 1/2" female outlet connection for air vents or charge/discharge valves. The manifold is assembled in noise reducing brackets. Delivered in a box with stickers



L = Length of manifold n = Number of circuits