
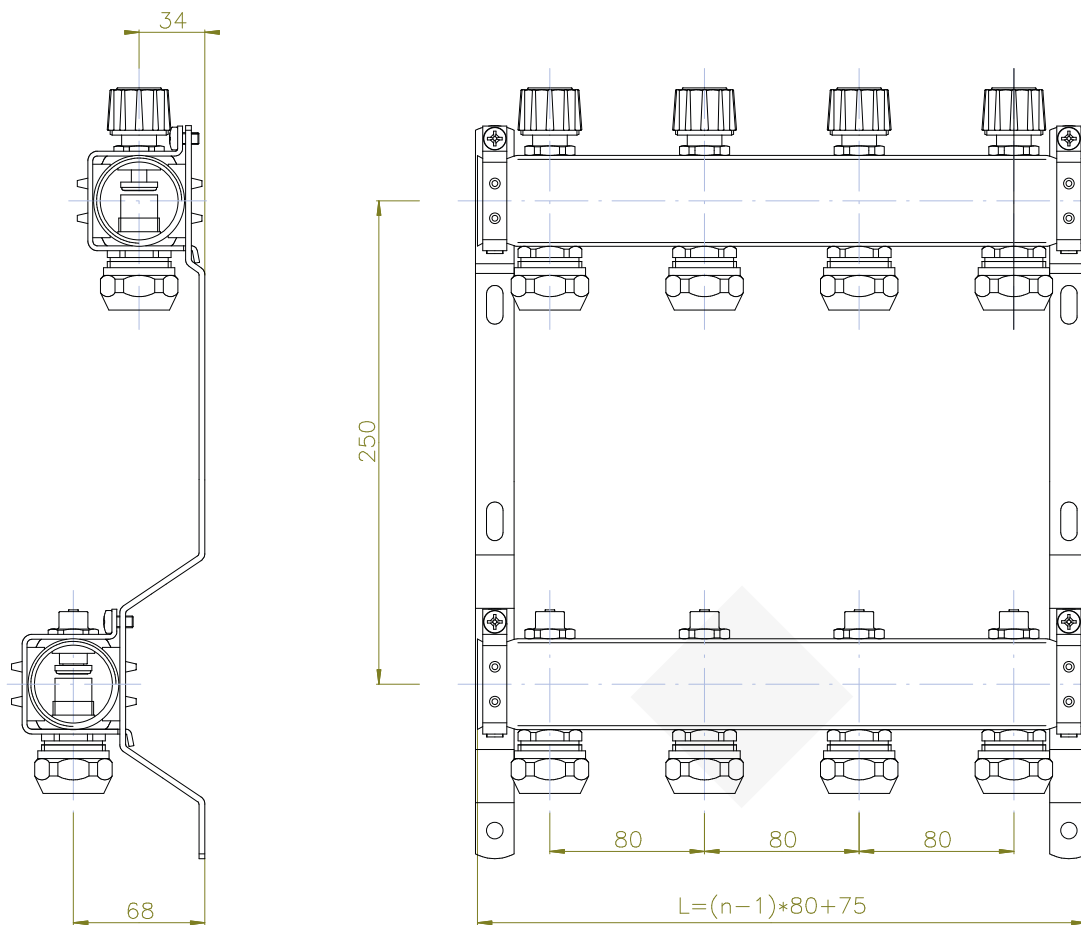


Specifications		Circuits	Type	Length	Art-Nr.
 <p>Manifolds: Stainless Steel AISI 304</p> <p>Dimension: DN50 Stainless Steel profile, 1760mm² cross-sectional area</p> <p>Connections: 1 1/4" female head connection on both sides</p> <p>Supply: Built-in balancer register lockshields</p> <p>Return: Built-in control LIVES with pre-setting</p> <ul style="list-style-type: none"> • M30x1,5mm threads • with handwheel • ready for electrothermic actuators • Kvs 3,9 <p>Connections: compression couplings 25x2.3mm, center distance 80mm</p>					
		2	XL-FBi 2	155 mm	3302
		3	XL-FBi 3	235 mm	3303
		4	XL-FBi 4	315 mm	3304
		5	XL-FBi 5	395 mm	3305
		6	XL-FBi 6	475 mm	3306
		7	XL-FBi 7	555 mm	3307
		8	XL-FBi 8	635 mm	3308
		9	XL-FBi 9	715 mm	3309
		10	XL-FBi 10	795 mm	3310
		11	XL-FBi 11	875 mm	3311
		12	XL-FBi 12	955 mm	3312
		13	XL-FBi 13	1035 mm	3313
		14	XL-FBi 14	1115 mm	3314

Delivery:

Stainless steel manifold packages include supply manifold and return manifold. For use in combination with pipes size 25x2.3mm. The manifold is delivered in a box with noise reducing brackets, stickers and manual.



L = Length of manifold n = Number of circuits