
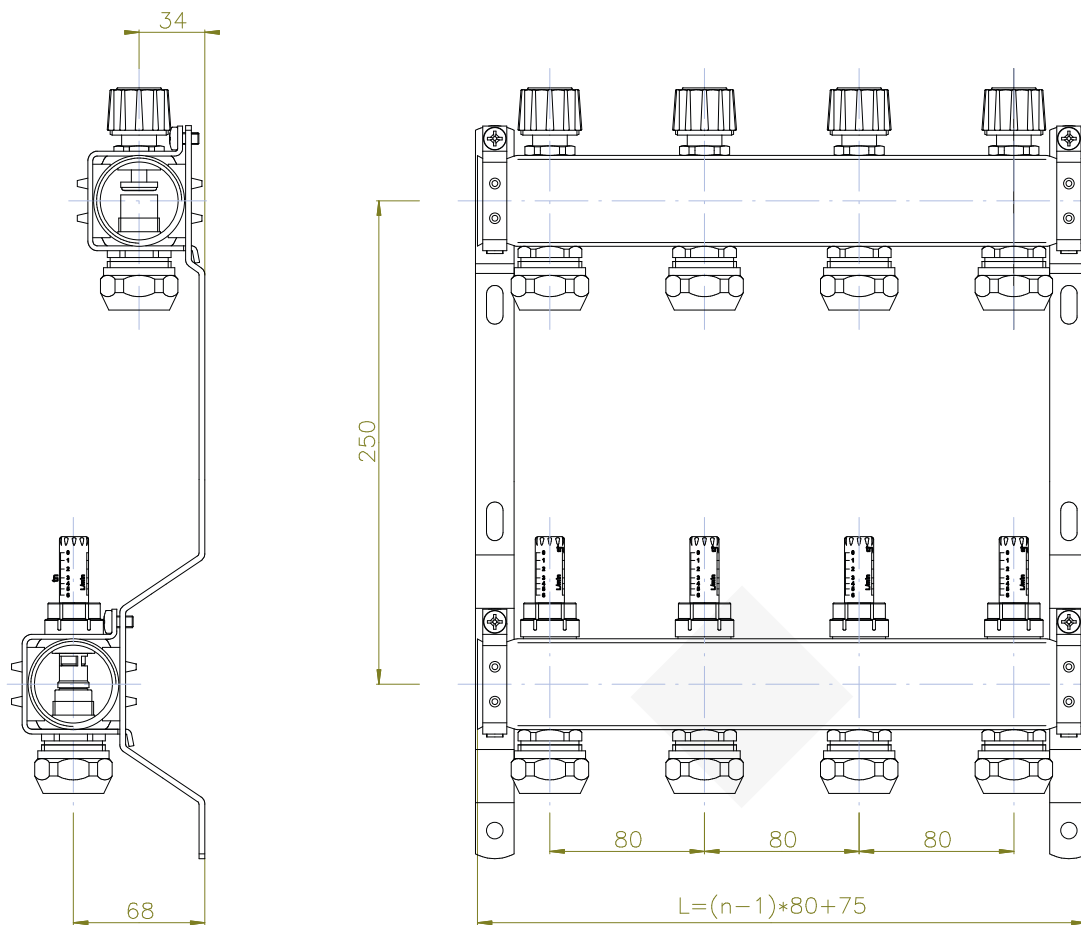


Specifications		Circuits	Type	Length	Art-Nr.
					
Manifolds:	Stainless Steel AISI 304	2	XL-FBif 2	155 mm	3602
Dimension:	DN50 Stainless Steel profile, 1760mm ² cross-sectional area	3	XL-FBif 3	235 mm	3603
Connections:	1 1/4" female head connection on both sides	4	XL-FBif 4	315 mm	3604
Supply:	Flowmeter 0-8,0 l/min	5	XL-FBif 5	395 mm	3605
Return:	Built-in control LIVES with pre-setting <ul style="list-style-type: none"> • M30x1,5mm threads • with handwheel • ready for electrothermic actuators • Kvs 3,9 	6	XL-FBif 6	475 mm	3606
		7	XL-FBif 7	555 mm	3607
		8	XL-FBif 8	635 mm	3608
		9	XL-FBif 9	715 mm	3609
		10	XL-FBif 10	795 mm	3610
		11	XL-FBif 11	875 mm	3611
		12	XL-FBif 12	955 mm	3612
		13	XL-FBif 13	1035 mm	3613
		14	XL-FBif 14	1115 mm	3614
		Connections:	compression couplings 25x2.3mm, center distance 80mm		

Delivery:

Stainless steel manifold packages include supply manifold and return manifold. For use in combination with pipes size 25x2.3mm. The manifold is delivered in a box with noise reducing brackets, stickers and manual.



L = Length of manifold n = Number of circuits