
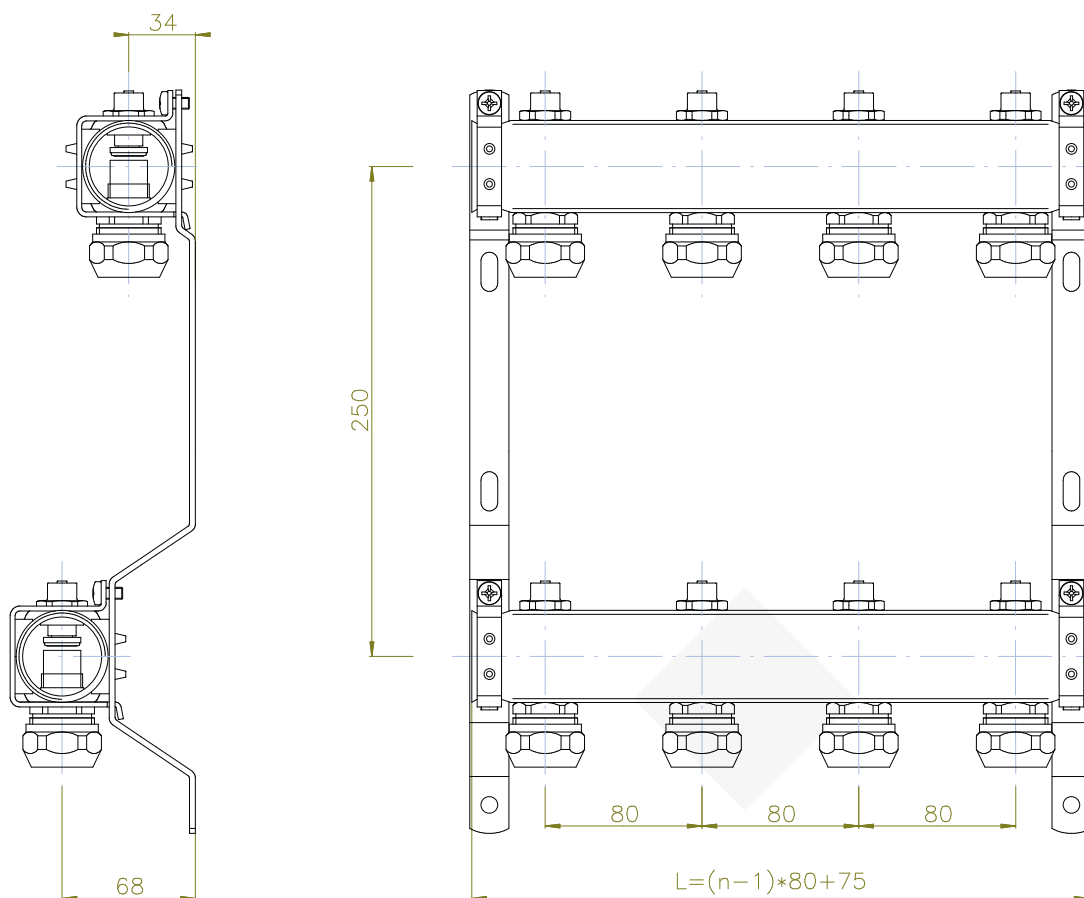


Specifications		Circuits	Type	Length	Art-Nr.
					
Manifolds:	Stainless Steel AISI 304	2	XL-HKi 2	155 mm	2402
Dimension:	DN50 Stainless Steel profile, 1760mm ² cross-sectional area	3	XL-HKi 3	235 mm	2403
Connections:	1 1/4" female head connection on both sides	4	XL-HKi 4	315 mm	2404
Supply:	Built-in balancer register lockshields	5	XL-HKi 5	395 mm	2405
Return:	Built-in balancer register lockshields	6	XL-HKi 6	475 mm	2406
		7	XL-HKi 7	555 mm	2407
		8	XL-HKi 8	635 mm	2408
		9	XL-HKi 9	715 mm	2409
		10	XL-HKi 10	795 mm	2410
		11	XL-HKi 11	875 mm	2411
		12	XL-HKi 12	955 mm	2412
		13	XL-HKi 13	1035 mm	2413
		14	XL-HKi 14	1115 mm	2414
		Connections:	compression couplings 25x2.3mm, center distance 80mm		

Delivery:

Stainless steel manifold packages include supply manifold and return manifold. For use in combination with pipes size 25x2.3mm. The manifold is delivered in a box with noise reducing brackets, stickers and manual.



L = Length of manifold n = Number of circuits