




Specifications		Circuits	Type	Length	Art-Nr.
 					
<b>Manifolds:</b>	Stainless Steel AISI 304				
<b>Dimension:</b>	DN32 Stainless Steel profile, 1330 mm <sup>2</sup> cross-sectional area				
<b>Connections:</b>	1" female head connection on both sides				
<b>Supply:</b>	Built-in balancer lockshields				
<b>Return:</b>	Built-in control valves with pre-setting <ul style="list-style-type: none"> <li>• automatic flow control</li> <li>• infinitely variable flow setting 30-300 l/h</li> <li>• differential pressure max. 60kPA, min. 15 kPA (30-150 l/h) up to 20 kPA (150-300 l/h)</li> <li>• M30x1,5 mm threads</li> <li>• with handwheel</li> <li>• ready for electrothermic actuators</li> </ul>				
<b>Connections:</b>	secondary, 3/4" male-Eurocone, center distance 50 mm				
		<b>2</b>	DYNA-i 2	190 mm	<b>3502</b>
		<b>3</b>	DYNA-i 3	240 mm	<b>3503</b>
		<b>4</b>	DYNA-i 4	290 mm	<b>3504</b>
		<b>5</b>	DYNA-i 5	340 mm	<b>3505</b>
		<b>6</b>	DYNA-i 6	390 mm	<b>3506</b>
		<b>7</b>	DYNA-i 7	440 mm	<b>3507</b>
		<b>8</b>	DYNA-i 8	490 mm	<b>3508</b>
		<b>9</b>	DYNA-i 9	540 mm	<b>3509</b>
		<b>10</b>	DYNA-i 10	590 mm	<b>3510</b>
		<b>11</b>	DYNA-i 11	640 mm	<b>3511</b>
		<b>12</b>	DYNA-i 12	690 mm	<b>3512</b>
		<b>13</b>	DYNA-i 13	740 mm	<b>3513</b>

**NEW**

**Delivery:**

Stainless steel manifold packages for Underfloor Heating include supply manifold and return manifold, each with two 1/2" female outlet connections for air vents and charge/discharge valves. The manifold is assembled in noise reducing brackets. Delivered in a box with stickers and manual.

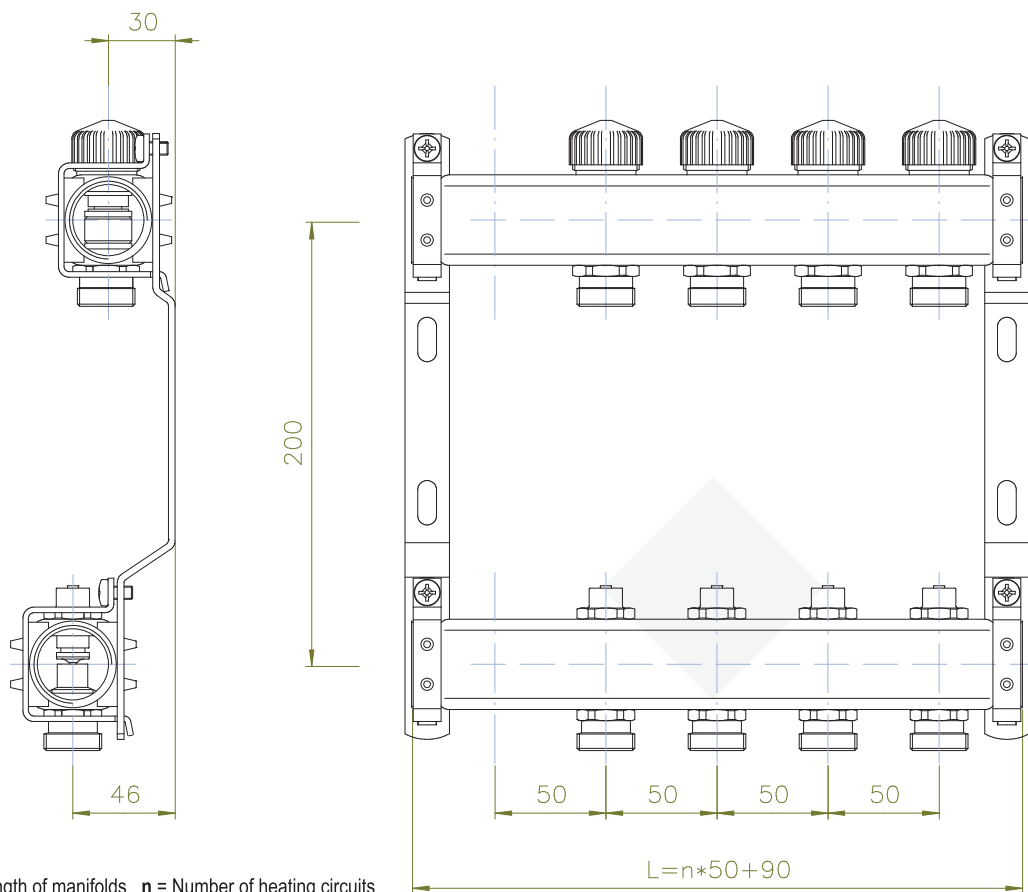

L = Length of manifolds n = Number of heating circuits