


Specifications		Circuits	Type	Length	Art-Nr.				
		<div style="background-color: green; color: white; padding: 5px; display: inline-block; transform: rotate(-2deg); font-weight: bold; font-size: 1.2em;">NEW</div>							
Manifolds:	Stainless Steel AISI 304								
Dimension:	DN32 Stainless Steel profile, 1330 mm ² cross-sectional area								
Connections:	1" female head connection on both sides								
Supply:	Flowmeter 0-5,0 l/min								
Return:	Built-in control valves with pre-setting <ul style="list-style-type: none"> • automatic flow control • infinitely variable flow setting 30-300 l/h • differential pressure max. 60kPA, min. 15 kPA (30-150 l/h) up to 20 kPA (150-300 l/h) • M30x1,5 mm threads • with handwheel • ready for electrothermic actuators 								
Connections:	secondary, 3/4" male-Eurocone, center distance 50 mm					2	DYNA-if 2	190 mm	3802
						3	DYNA-if 3	240 mm	3803
						4	DYNA-if 4	290 mm	3804
						5	DYNA-if 5	340 mm	3805
						6	DYNA-if 6	390 mm	3806
						7	DYNA-if 7	440 mm	3807
						8	DYNA-if 8	490 mm	3808
		9	DYNA-if 9	540 mm	3809				
		10	DYNA-if 10	590 mm	3810				
		11	DYNA-if 11	640 mm	3811				
		12	DYNA-if 12	690 mm	3812				
		13	DYNA-if 13	740 mm	3813				

Delivery:
 Stainless steel manifold packages for Underfloor Heating include supply manifold and return manifold, each with two 1/2" female outlet connections for air vents and charge/discharge valves. The manifold is assembled in noise reducing brackets. Delivered in a box with stickers and manual.

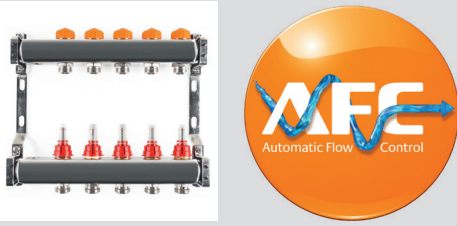