

Specifications		Circuits	Type	Length	Art-Nr.
		2	L-FBi 2	125 mm	3202
		3	L-FBi 3	175 mm	3203
		4	L-FBi 4	225 mm	3204
		5	L-FBi 5	275 mm	3205
		6	L-FBi 6	325 mm	3206
		7	L-FBi 7	375 mm	3207
		8	L-FBi 8	425 mm	3208
		9	L-FBi 9	475 mm	3209
		10	L-FBi 10	525 mm	3210
		11	L-FBi 11	575 mm	3211
		12	L-FBi 12	625 mm	3212
		13	L-FBi 13	675 mm	3213
		14	L-FBi 14	725 mm	3214
		15	L-FBi 15	775 mm	3215
		16	L-FBi 16	825 mm	3216
		17	L-FBi 17	875 mm	3217
		18	L-FBi 18	925 mm	3218

Manifolds: Stainless Steel AISI 304

Dimension: DN50 Stainless Steel profile, 1760mm² cross-sectional area

Connections: 1¼" female head connection on both sides


Supply: Built-in balancer register lockshields

Return: Built-in control LIVES with pre-setting

- M30x1,5mm threads
- with handwheel
- ready for electrothermic actuators
- Kvs 2,74

Connections: secondary, 3/4" male-Eurocone, center distance 50mm

Delivery: Stainless steel manifold packages for Underfloor Heating include supply manifold and return manifold. The manifold is assembled in noise reducing brackets. Delivered in a box with stickers and manual.

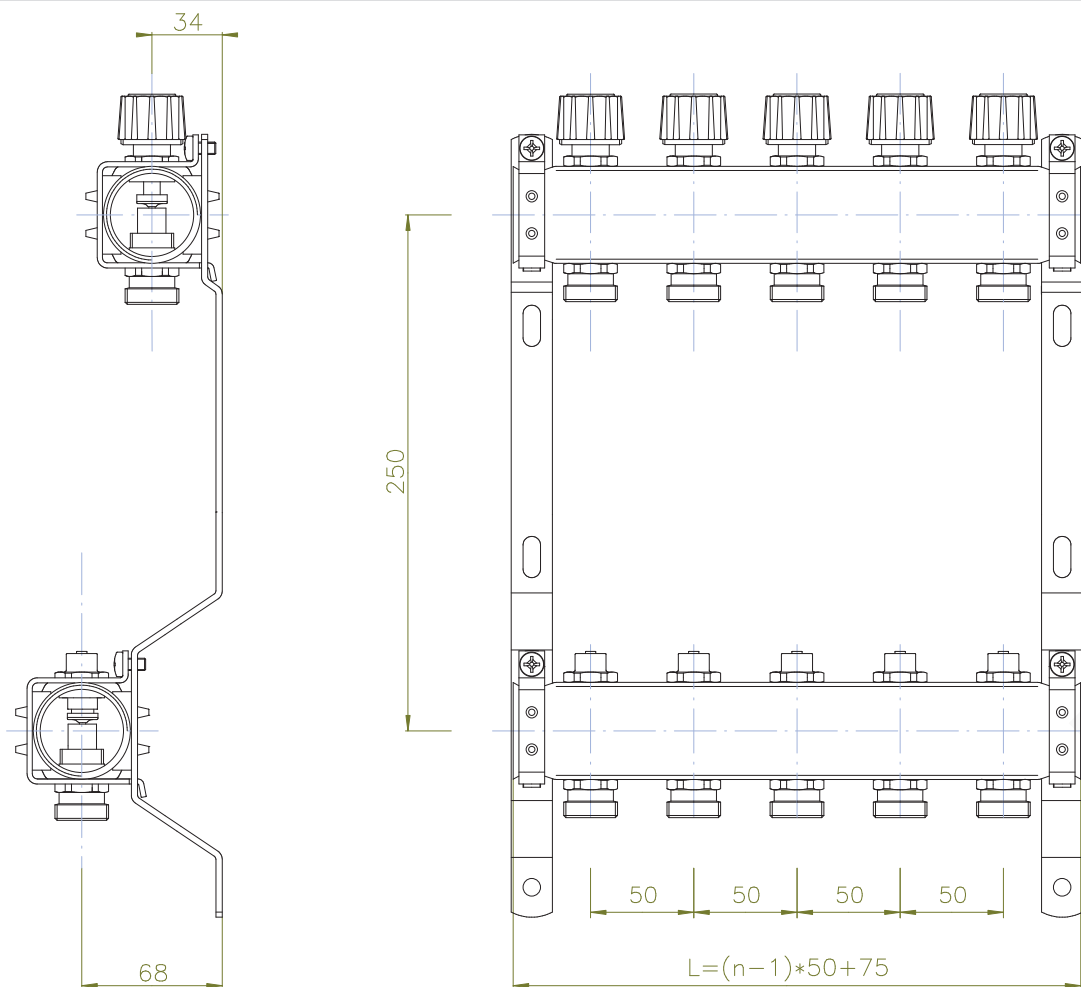

L = Length of manifold n = Number of circuits