



Specifications		Circuits	Type	Length	Art-Nr.
		2	L-FBif 2	125 mm	3902
		3	L-FBif 3	175 mm	3903
		4	L-FBif 4	225 mm	3904
		5	L-FBif 5	275 mm	3905
		6	L-FBif 6	325 mm	3906
		7	L-FBif 7	375 mm	3907
		8	L-FBif 8	425 mm	3908
		9	L-FBif 9	475 mm	3909
		10	L-FBif 10	525 mm	3910
		11	L-FBif 11	575 mm	3911
		12	L-FBif 12	625 mm	3912
		13	L-FBif 13	675 mm	3913
		14	L-FBif 14	725 mm	3914
		15	L-FBif 15	775 mm	3915
		16	L-FBif 16	825 mm	3916
		17	L-FBif 17	875 mm	3917
		18	L-FBif 18	925 mm	3918
		<b>Manifolds:</b>	Stainless Steel AISI 304		
<b>Dimension:</b>	DN50 Stainless Steel profile, 1760mm <sup>2</sup> cross-sectional area				
<b>Connections:</b>	1¼" female head connection on both sides				
<b>Supply:</b>	Flowmeter 0-5,0 l/min				
<b>Return:</b>	Built-in control LIVES with pre-setting <ul style="list-style-type: none"> <li>• M30x1,5mm threads</li> <li>• with handwheel</li> <li>• ready for electrothermic actuators</li> <li>• Kvs 2,74</li> </ul>				
<b>Connections:</b>	secondary, 3/4" male-Eurocone, center distance 50mm				

**Delivery:**

Stainless steel manifold packages for Underfloor Heating include supply manifold and return manifold, each with two 1/2" female outlet connections for air vents and charge/discharge valves. The manifold is assembled in noise reducing brackets. Delivered in a box with stickers.

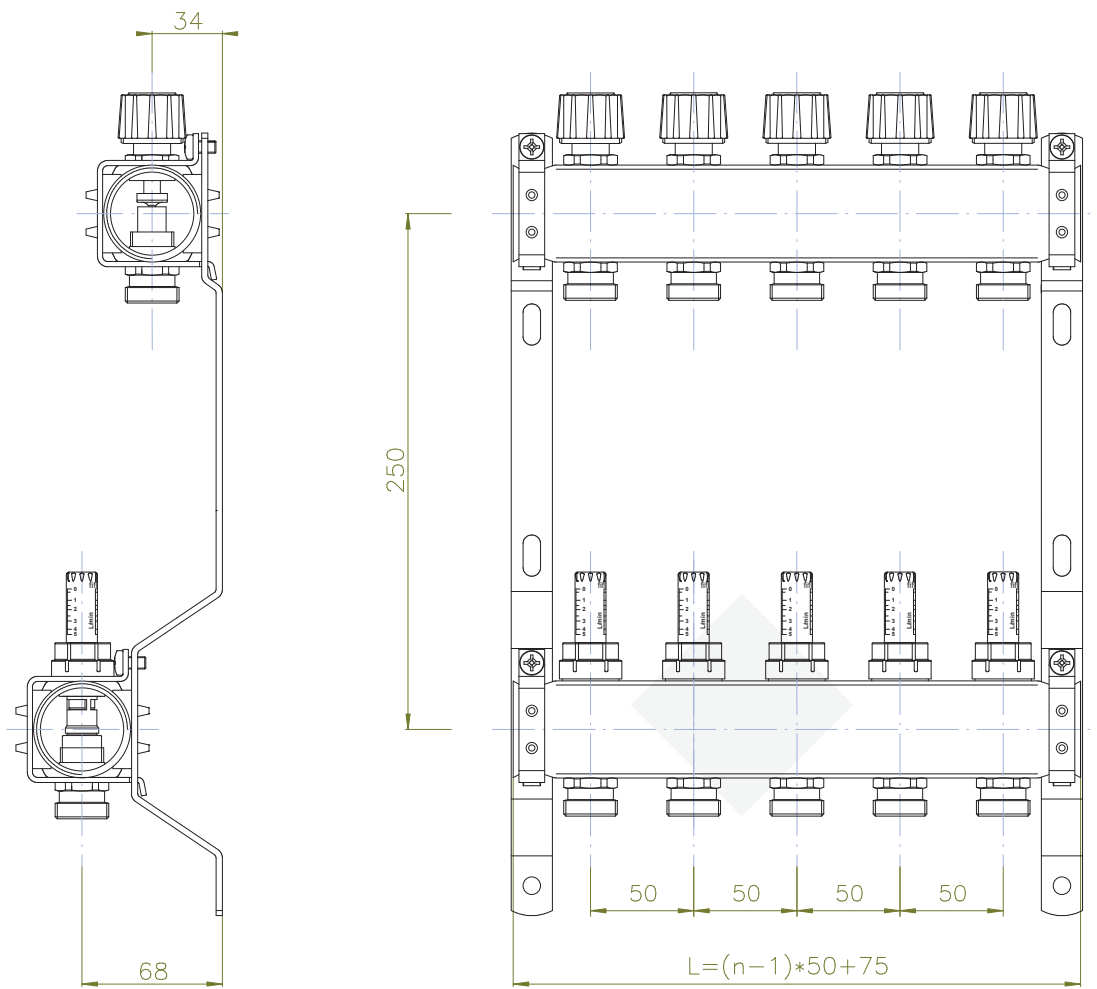

L = Length of manifold n = Number of circuits