
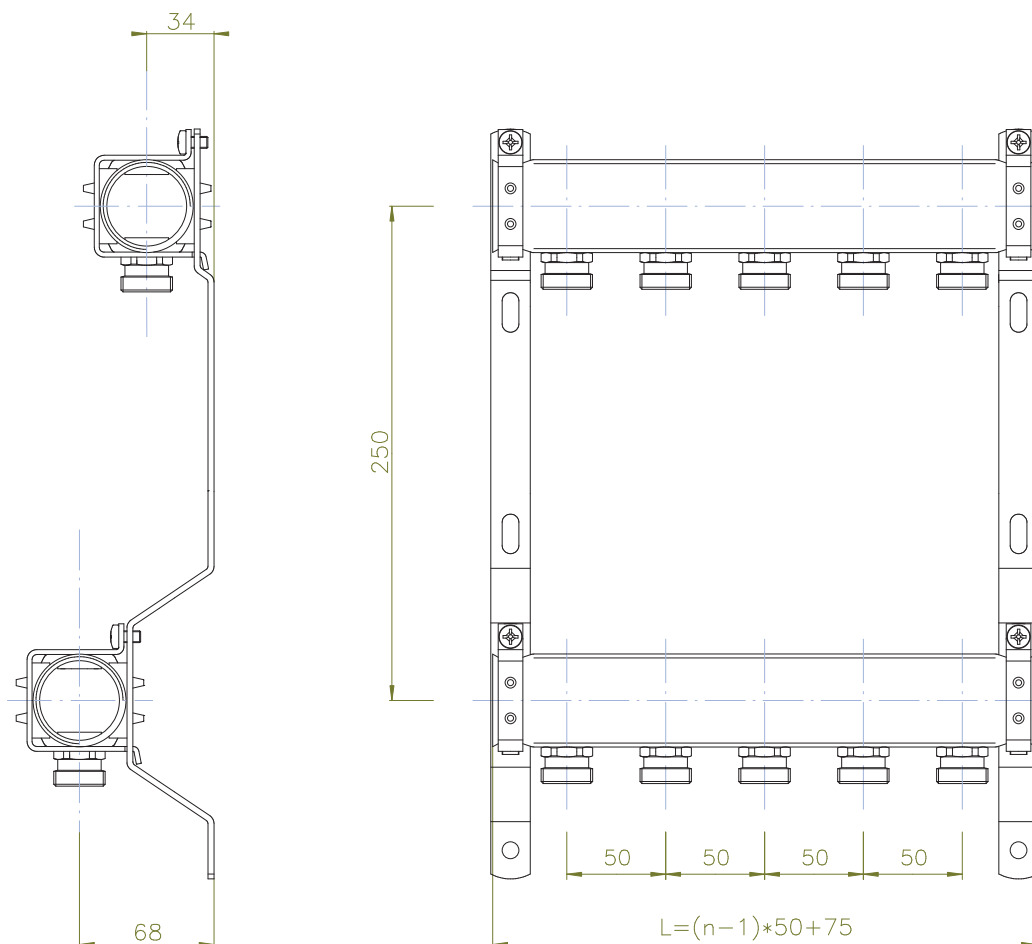


Specifications		Kreise	Typ	Länge	Best-Nr.
					
<b>Manifolds:</b>	Stainless Steel AISI 304	<b>2</b>	L-HK 2	125 mm	<b>2802</b>
<b>Dimension:</b>	DN50 Stainless Steel profile, 1760mm <sup>2</sup> cross-sectional area	<b>3</b>	L-HK 3	175 mm	<b>2803</b>
<b>Connections:</b>	1¼" female head connection on both sides	<b>4</b>	L-HK 4	225 mm	<b>2804</b>
<b>Supply:</b>	3/4" male-Eurocone	<b>5</b>	L-HK 5	275 mm	<b>2805</b>
<b>Return:</b>	3/4" male-Eurocone	<b>6</b>	L-HK 6	325 mm	<b>2806</b>
		<b>7</b>	L-HK 7	375 mm	<b>2807</b>
		<b>8</b>	L-HK 8	425 mm	<b>2808</b>
		<b>9</b>	L-HK 9	475 mm	<b>2809</b>
		<b>10</b>	L-HK 10	525 mm	<b>2810</b>
		<b>11</b>	L-HK 11	575 mm	<b>2811</b>
		<b>12</b>	L-HK 12	625 mm	<b>2812</b>
		<b>13</b>	L-HK 13	675 mm	<b>2813</b>
<b>Connections:</b>	center distance 50mm	<b>14</b>	L-HK 14	725 mm	<b>2814</b>

**Delivery:**

Stainless steel manifold packages for Underfloor Heating include supply manifold and return manifold. The manifold is assembled in noise reducing brackets. Delivered in a box with stickers.



L = Length of manifold n = Number of circuits